



# GP12-60 (12V60Ah)

GP12-60 is a general purpose battery with 10 years floating design life, meet with IEC, JIS .BS and Eurobat standard. With heavy duty grid, thickness plates, special additives, GP series battery have long and reliable standby service life. Our GP Series batteries keep high consistent for better performance in series usage.



## Specification

|                                            |                                                                                                                                                             |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cells P er Unit                            | 6                                                                                                                                                           |
| Voltage Per Unit                           | 12                                                                                                                                                          |
| Capacity                                   | 60Ah@10hr-rate to 1.75V per cell @25°C                                                                                                                      |
| Weight                                     | Approx. 20.5 Kg                                                                                                                                             |
| Max. Discharge Current                     | 600A (5 sec)                                                                                                                                                |
| Internal Resistance                        | Approx. 6 mΩ                                                                                                                                                |
| Operating Temperature Range                | Discharge: -20°C~60°C<br>Charge: 0°C~50°C<br>Storage: -20°C~60°C                                                                                            |
| Normal Operating Temperature Range         | 25°C±5°C                                                                                                                                                    |
| Float charging Voltage                     | 13.6 to 13.8 VDC/unit Average at 25°C                                                                                                                       |
| Recommended Maximum Charging Current Limit | 18.0 A                                                                                                                                                      |
| Equalization and Cycle Service             | 14.6 to 14.8 VDC/unit Average at 25°C                                                                                                                       |
| Self Discharge                             | GETPOWER batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using. |
| Terminal                                   | Terminal F15                                                                                                                                                |
| Container Material                         | A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.                                                                         |



MH28539







G4M20206-0910-E-16



ISO9001:2000 Certificate

## Dimensions

Unit: m m Dimension: 260(L)×169(W)×210(H)



## Constant Current Discharge Characteristics: A (25°C)

| F.V/Time | 5MIN   | 10MIN  | 15MIN  | 30MIN  | 1HR    | 2HR    | 3HR    | 4HR    | 5HR     | 8HR    | 10HR   | 20HR   |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|---------|--------|--------|--------|
| 9.60V    | 209.66 | 154.37 | 112.32 | 69.000 | 39.000 | 21.785 | 15.660 | 12.960 | 10.608  | 7.4531 | 6.3018 | 3.3327 |
| 10.0V    | 203.60 | 146.88 | 110.02 | 67.860 | 38.820 | 21.622 | 15.600 | 12.900 | 10.546  | 7.3925 | 6.2412 | 3.2721 |
| 10.2V    | 197.57 | 141.70 | 108.29 | 67.260 | 38.460 | 21.458 | 15.480 | 12.840 | 10.483  | 7.3319 | 6.1806 | 3.2115 |
| 10.5V    | 177.41 | 130.75 | 103.10 | 65.580 | 38.100 | 21.294 | 15.420 | 12.720 | 10.3584 | 7.2713 | 6.1200 | 3.1509 |
| 10.8V    | 160.13 | 119.23 | 95.040 | 62.700 | 37.200 | 20.912 | 15.000 | 12.420 | 10.1712 | 7.1501 | 6.0594 | 3.0903 |
| 11.1V    | 139.39 | 106.56 | 85.248 | 58.740 | 35.340 | 19.984 | 14.340 | 11.820 | 9.7344  | 6.8471 | 5.8776 | 2.9085 |


## Constant Power Discharge Characteristics: W (25°C)

| F.V/Time | 5MIN   | 10MIN  | 15MIN  | 30MIN  | 1HR    | 2HR    | 3HR    | 4HR    | 5HR    | 8HR    | 10HR   | 20HR   |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 9.60V    | 2199.0 | 1641.5 | 1208.6 | 739.75 | 446.04 | 250.61 | 180.72 | 149.76 | 122.80 | 86.485 | 70.860 | 37.429 |
| 10.0V    | 2140.2 | 1567.9 | 1183.5 | 730.51 | 443.88 | 249.63 | 180.36 | 149.40 | 122.05 | 86.122 | 70.133 | 37.065 |
| 10.2V    | 2075.8 | 1515.6 | 1167.4 | 721.96 | 440.64 | 247.34 | 179.28 | 148.68 | 121.68 | 85.395 | 69.770 | 36.702 |
| 10.5V    | 1869.2 | 1400.5 | 1113.2 | 705.55 | 436.32 | 245.04 | 178.20 | 147.60 | 120.56 | 84.668 | 69.043 | 36.338 |
| 10.8V    | 1681.4 | 1271.6 | 1022.8 | 673.40 | 425.52 | 241.44 | 173.88 | 143.64 | 118.68 | 82.852 | 68.316 | 35.975 |
| 11.1V    | 1451.4 | 1129.3 | 913.33 | 630.99 | 403.20 | 230.30 | 165.24 | 136.80 | 112.69 | 79.944 | 66.136 | 34.521 |


All mentioned values are average values.



## Effect of temperature on long term float life

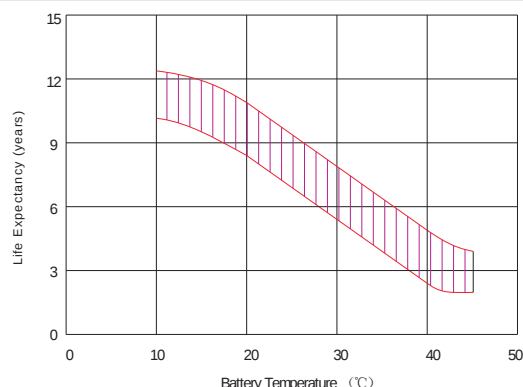

## Storage characteristic

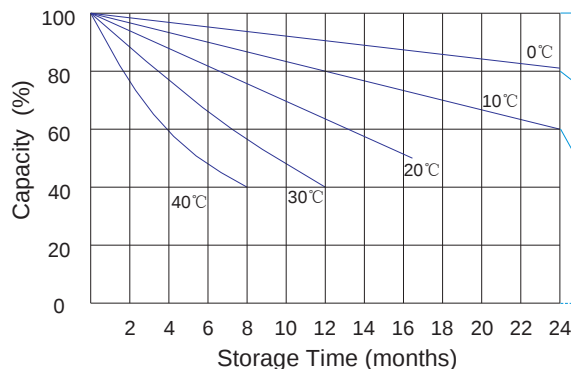


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is required)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guidelines

## Charge characteristic Curve for standby use

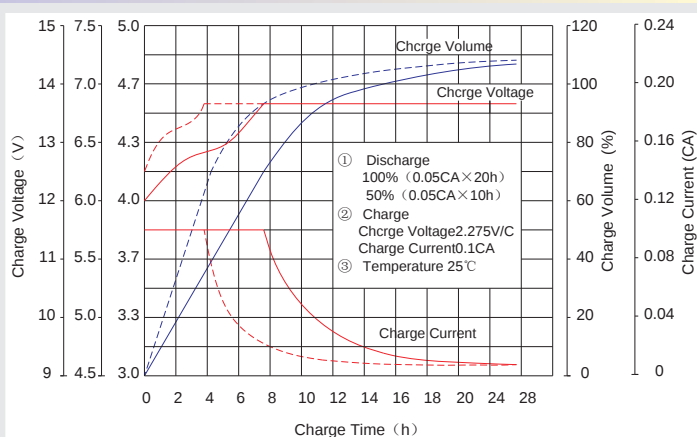

## Discharge characteristic Curve

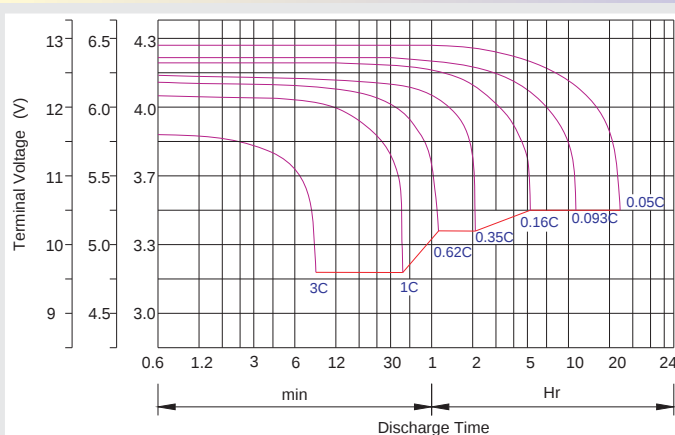

## Capacity Factors With Different Temperature

| Battery Type |        | -20°C | -10°C | 0°C | 5°C | 10°C | 20°C | 25°C | 30°C | 40°C | 45°C |
|--------------|--------|-------|-------|-----|-----|------|------|------|------|------|------|
| GEL Battery  | 6V&12V | 50%   | 70%   | 83% | 85% | 90%  | 98%  | 100% | 102% | 104% | 105% |
|              | 2V     | 60%   | 75%   | 85% | 88% | 92%  | 99%  | 100% | 103% | 105% | 106% |
| AGM Battery  | 6V&12V | 46%   | 66%   | 76% | 83% | 90%  | 98%  | 100% | 103% | 107% | 109% |
|              | 2V     | 55%   | 70%   | 80% | 85% | 92%  | 99%  | 100% | 104% | 108% | 110% |

## Discharge Current VS. Discharge Voltage

|                                |            |                   |            |
|--------------------------------|------------|-------------------|------------|
| Final Discharge Voltage V/cell | 1.75V      | 1.70V             | 1.60V      |
| Discharge Current (A)          | (A) ≤ 0.2C | 0.2C < (A) < 1.0C | (A) ≥ 1.0C |

Charge the batteries at least once every six months, if they are stored at 25°C.

## Charging Method:

|                  |                                                 |
|------------------|-------------------------------------------------|
| Constant Voltage | -0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3CA |
| Constant Current | -0.2Cx2h+0.1CAx12h                              |
| Fast             | -0.2Cx2h+0.3CAx4.0h                             |

## Maintenance &amp; Cautions

## Float Service:

- ※ Every month, recommend inspection every battery voltage.
- ※ Every three months, recommend equalization charge for one time.

## Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.

- ※ Effect of temperature on float charge voltage: -3mV/°C/Cell.

- ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.