

RF DIRECTIONAL COUPLERS 136 - 2200MHz • RSA Series




Fiplex RSA Series of RF Directional Couplers are passive devices designed to provide unequal power distribution to the output ports

Due to the internal configuration, this devices have a low VSWR value in all ports (less than 1.3:1, based on 50 ohms characteristic impedance) and low incidental insertion loss.

Power split ratios of 25/75 (6dB) and 10/90 (10dB0 are standard, other power ratios available upon request.

Direct input power up to 100W.

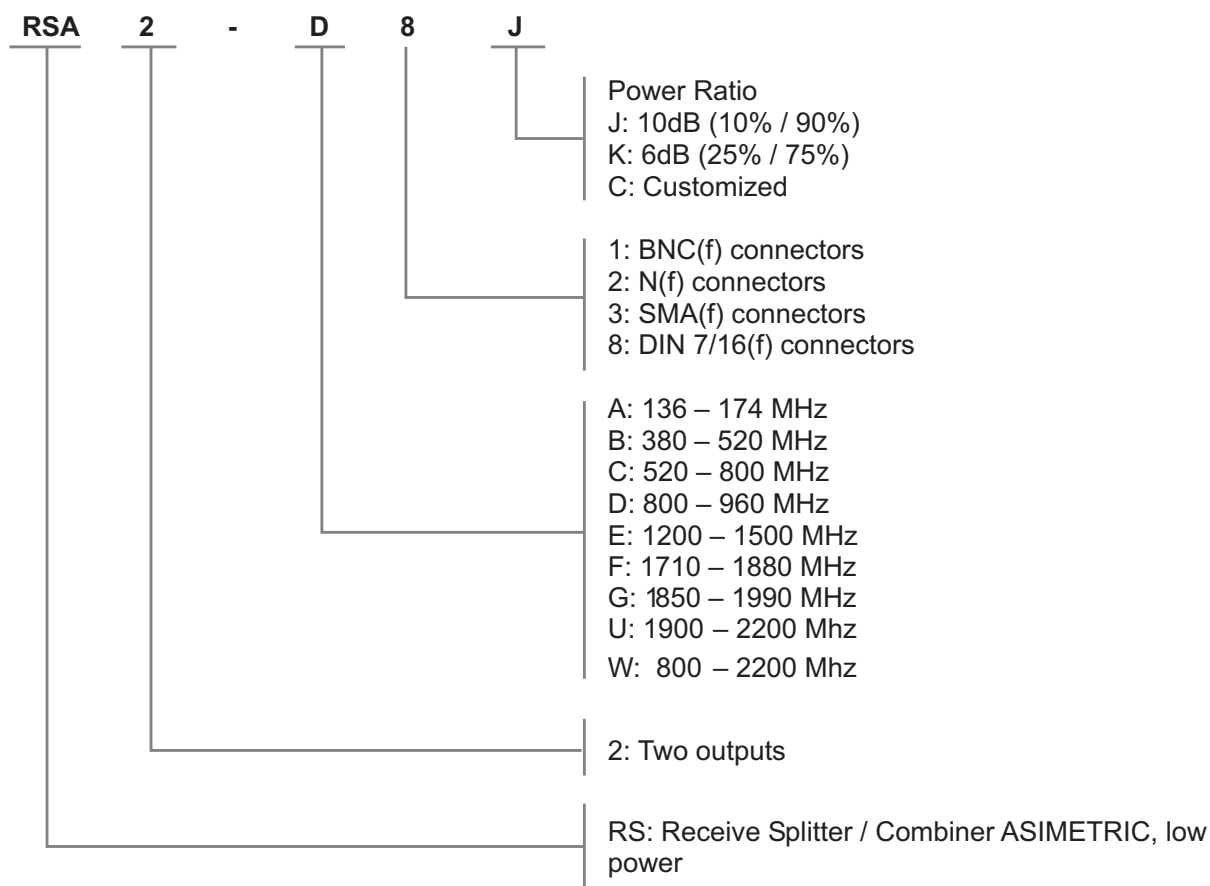

Factory reserves the right to change specifications without prior notice.

DOC SC009.01 • 19062006

7331 NW 54th Street • Miami FL 33166 • USA
Ph (305) 884-8991 • Fax (305) 884-4041
E mail: info@fiplex.com

Web Site: www.fiplex.com

S.Cabral 1242 • Córdoba (5006) • Argentina
Ph (54-351) 456-8263 • Fax (54-351) 456-2507
E mail: info@fiplex.com